

Model:

SS-320B Fail Secure
(Stromlos verriegelt)


Technische Daten

Spannungsversorgung	Keine dauerhafte Spannungsversorgung notwendig
Stromaufnahme	Nur während der Entriegelungszeit
Entriegelungsimpuls	12V DC - 0,8 A (nur während dem Entriegelungsimpuls)
Betriebstemperatur	-40 °C bis +60 °C
Material	Edelstahl, gehärteter Stahl, Vollmetallstruktur
Maße	Siehe Zeichnung
Aufbruchfestigkeit	Ca. 300 kg Druck-/Zugkraft
Mikroschalter	COM/NO/NC- Mikroschalter integriert – Rückmeldung Schlossposition.
Mechanische Notöffnung	Über einen Profilzylinder (EU-Standard)
Dornmaß Zylinder	32 mm
Montage	Schiebetüren (Holztüren, Metalltüren, Kunststofftüren, ...)

Produktmerkmale

Europäischer Standardzylinder, sowohl elektronisch als auch manuell (Notfall) bedienbar	Einsatz im Innen- und Außenbereich
Anti-Vandalismus-Funktion	Lebensdauer: Über 200.000 Zyklen
Vandalenschutz aus Edelstahl	Betriebstemperatur -40 °C bis +60 °C


Produktmaße

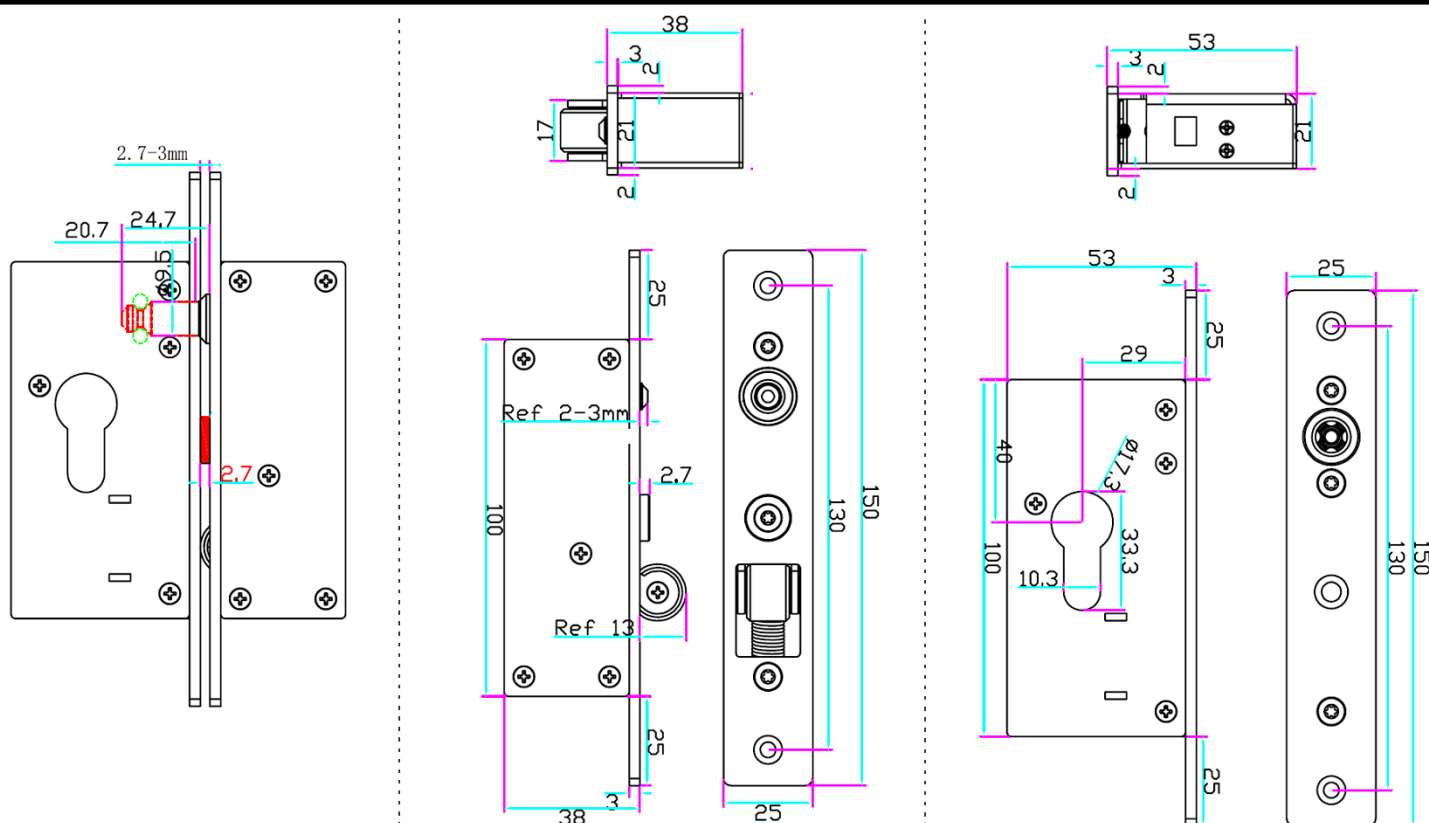


Model:

SS-320B Fail Secure
(Stromlos verriegelt)

Mechanische Installation

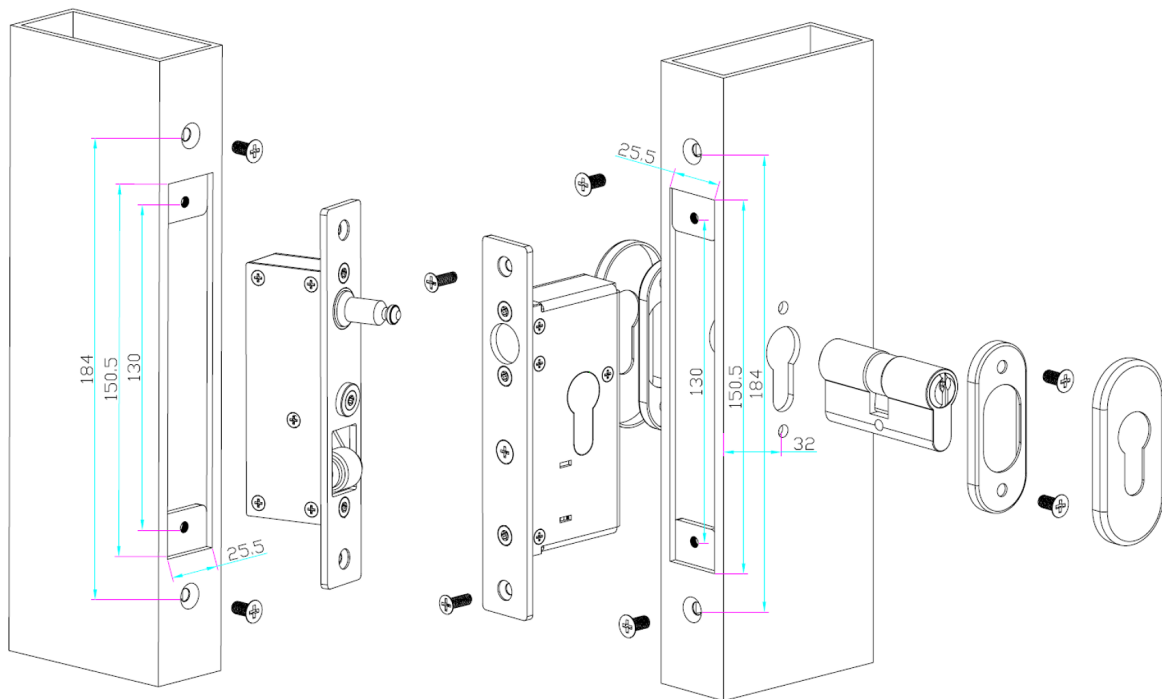

Elektrische Installation

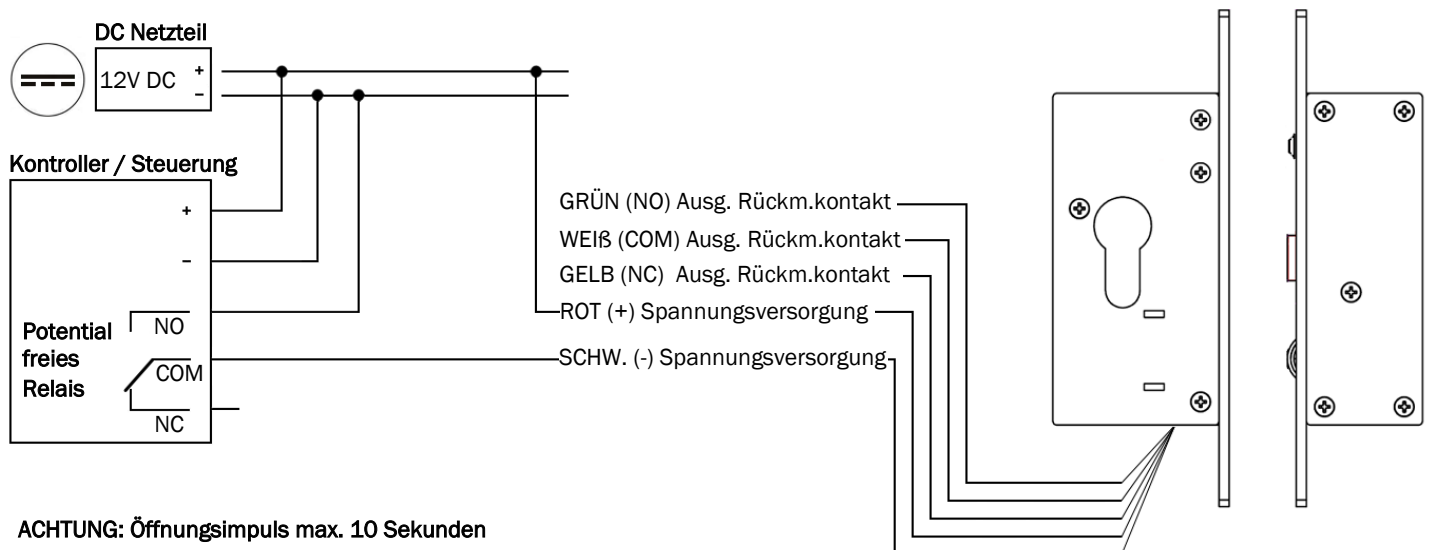

Model:

SS-320B Fail Secure
(Locked without power)


Technical Data

Power supply	No permanent power supply is required.
Power consumption	Only during the unlocking time
Unlocking	12V DC - 0,8 A (only during the unlocking time)
Operating temperature	-40 °C to +60 °C
Material	Stainless steel, hardened steel, all-metal structure
Dimensions	See diagramm
Break-in resistance	Approximately 300 kg compressive/tensile force
Microswitch	Integrated COM/NO/NC microswitch – lock position feedback
Mechanical emergency opening	Via a profile cylinder (EU standard)
Spindle dimension cylinder	32 mm
Mounting	Sliding doors (wooden doors, metal doors, plastic doors, ...)

Product features

European standard cylinder, operable both electronically and manually (emergency)	Suitable for indoor and outdoor use
Anti-vandalism function	Lifespan: Over 200,000 cycles
Vandal protection made of stainless steel	Operating temperature -40 °C to +60 °C


Product dimensions

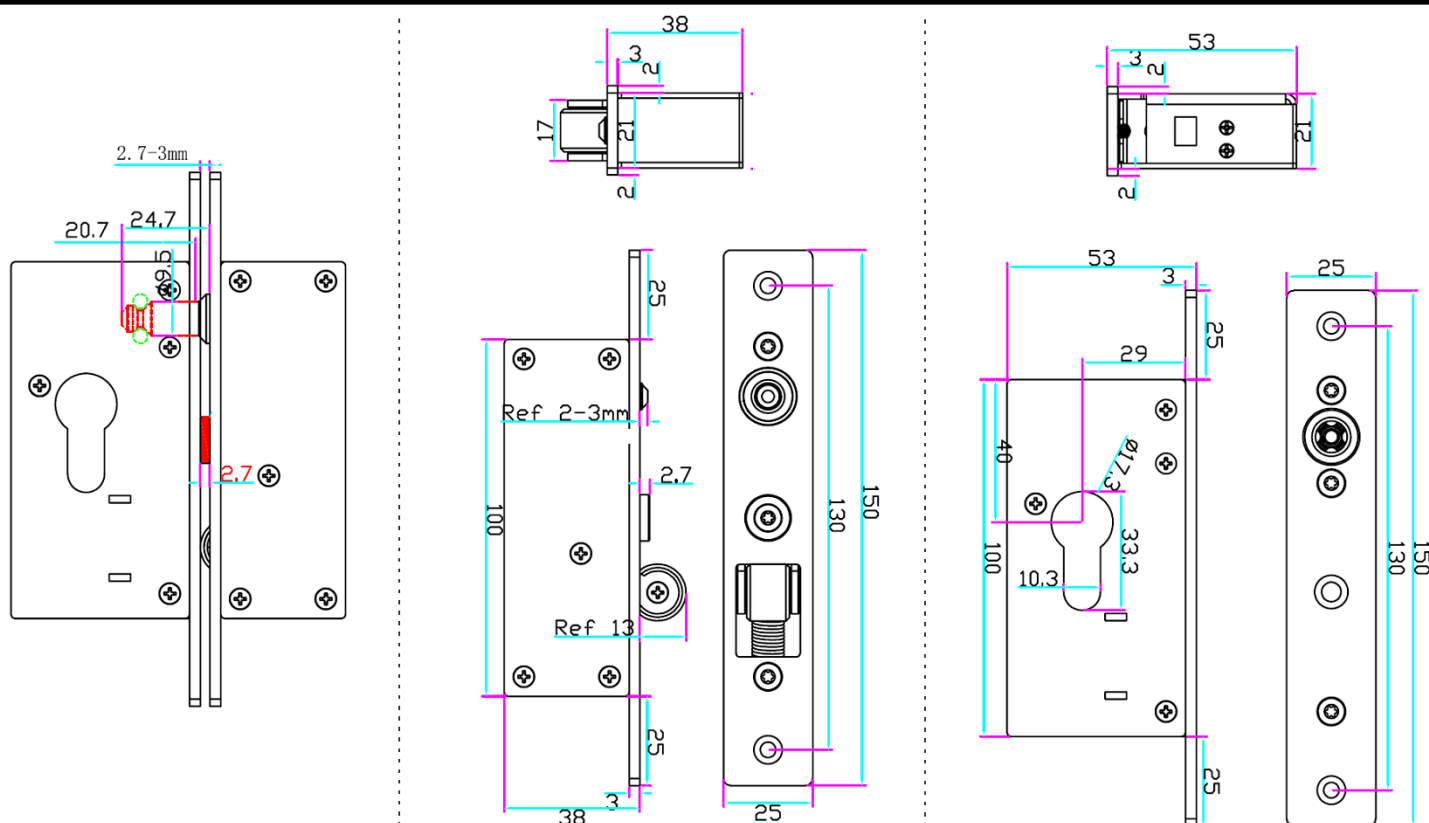


Model:

SS-320B Fail Secure
(Locked without power)

Mechanical installation

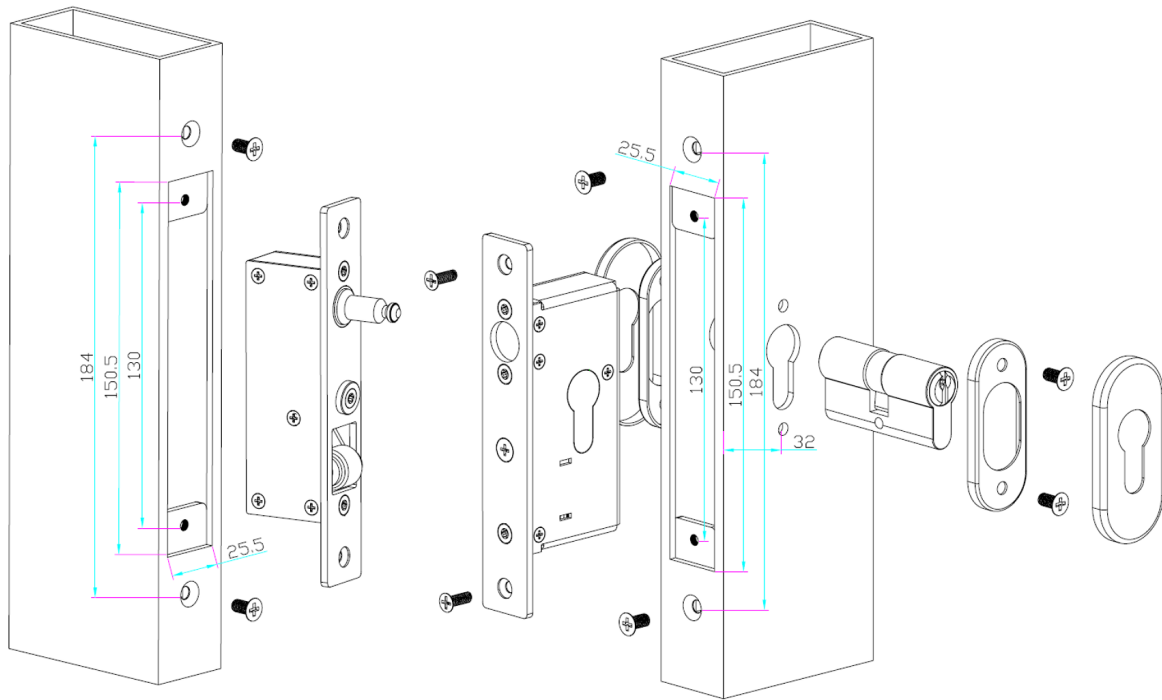

Electrical installation

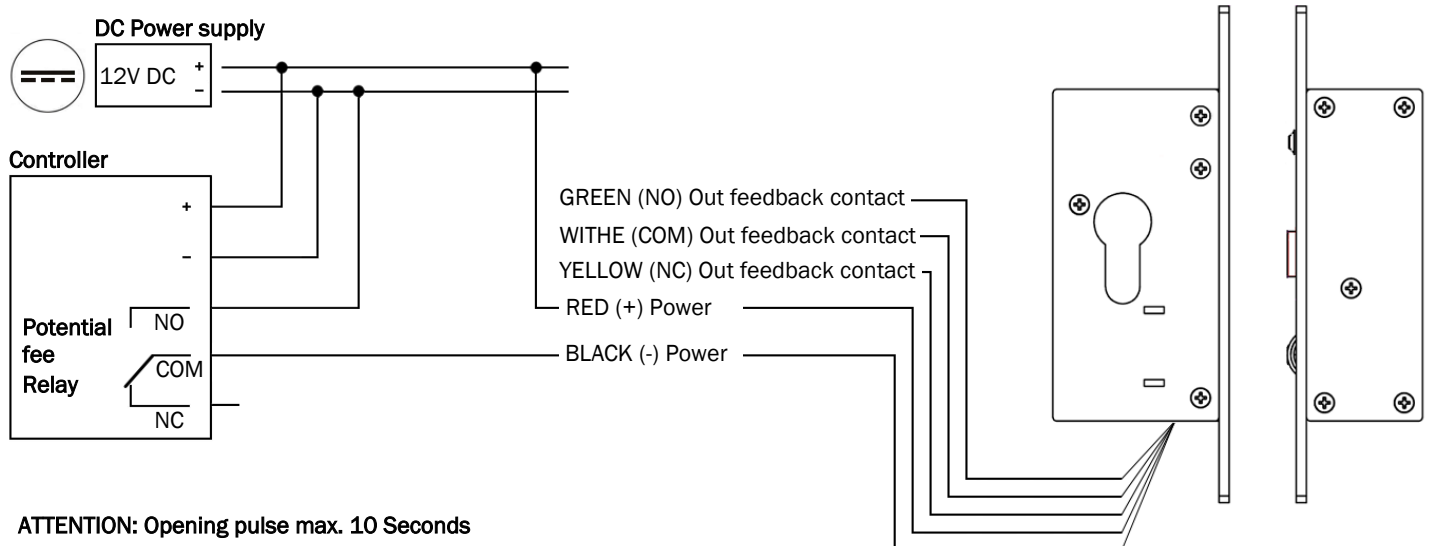

ATTENTION: Opening pulse max. 10 Seconds
Unlocking is achieved through a short impulse.