

Model:

BS-200A-IP / BS-200A-IP-24 Fail Safe
(Stromlos entriegelt)


Technische Daten

Spannungsversorgung	Für die Verriegelung ist dauerhafte Spannungsversorgung notwendig
Stromaufnahme	BS-200A-IP: 12V DC / 0,5A // BS-200A-IP-24: 24V DC 0,4A
Entriegelung	Abschalten der Spannungsversorgung (Entriegelung für die Dauer der Abschaltung)
Verriegelung	Zuschalten der Spannungsversorgung (Verriegelung für die Dauer der Zuschaltung) + Verschluss erfolgt sobald sich das Schloss gegenüber von dem Schließblech (Magnet) befindet
IP Klasse	IP 65
Bolzen	Bolzen: Ø 16 mm / Länge: 16mm / Edelstahl. Blende: Aluminium - Gehäuse: Aluminium
Maße	Siehe Zeichnung
Aufbruchfestigkeit	Ca. 800 kg (Scherkraft)
Statusausgang	Türposition: Reed-Kontakt (NO/COM) / Bolzenposition: Switch (NO/COM/NC)
Betriebstemperatur	-30 °C bis +55 °C
Montage	Türen (Holztüren, Metalltüren, Kunststofftüren, ...)

Produktmerkmale

Elektrischer Magnetantrieb + Feder.	BS-200A: Schloss entriegelt bei Stromausfall automatisch.
Spritzwasserfest: IP65.	Einsatz im Feuchträumen und Außenbereich.


Produktmaße

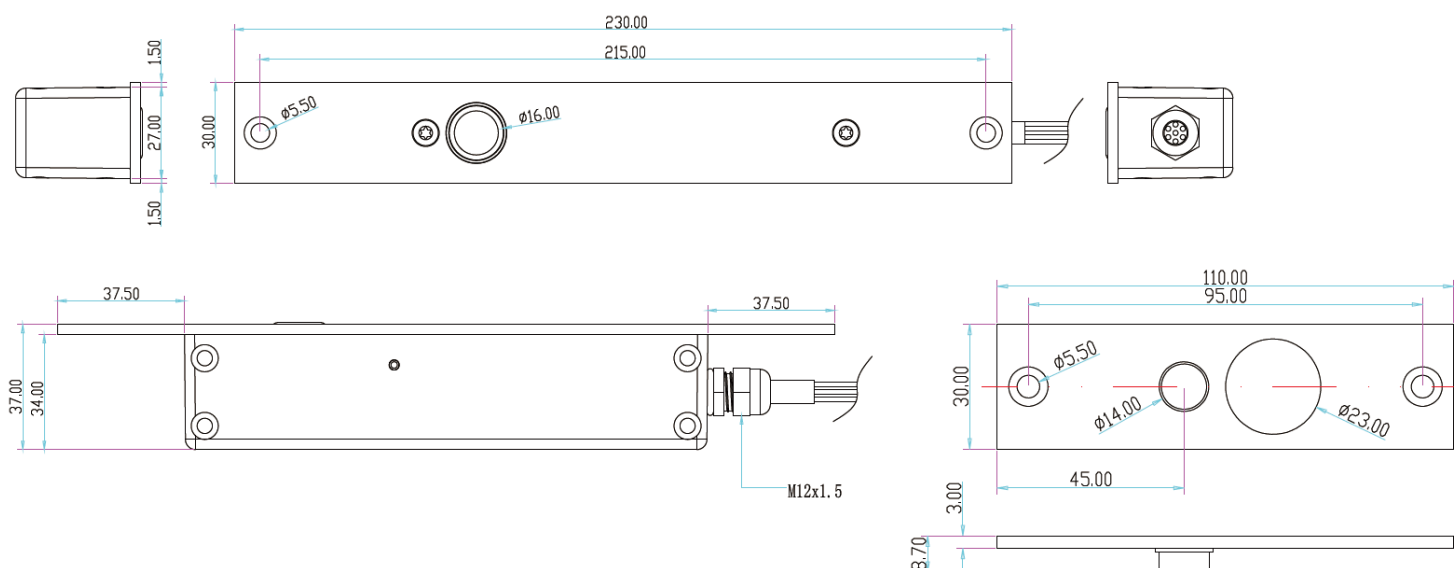


Model:

BS-200A-IP / BS-200A-IP-24 Fail Safe
(Stromlos entriegelt)


Mechanische Installation

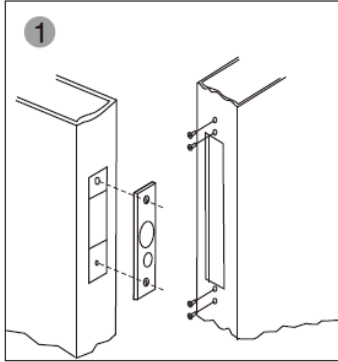


Markieren Sie die Abmessung der Löcher am Türblatt und schneiden Sie die Löcher für den Schlosskörper und die Magnetplatte.

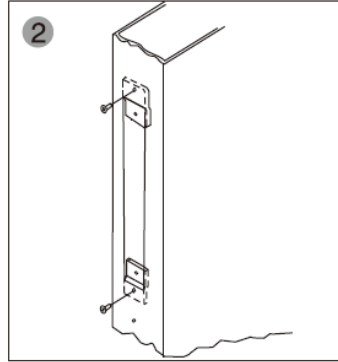

Installieren Sie den Befestigungswinkel.

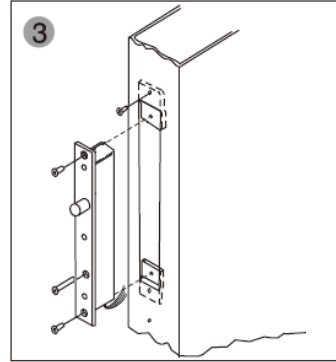

Schließen Sie die Stromversorgung an.

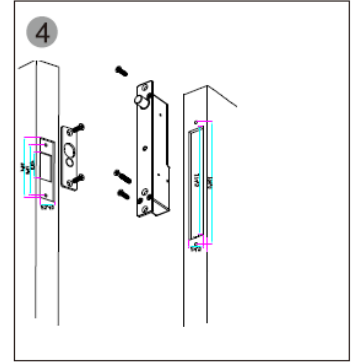


Befestigen Sie den Schließkörper, installieren Sie den Schließzylinder und die Abdeckplatte.

Installation Varianten




Oberflächenmontage

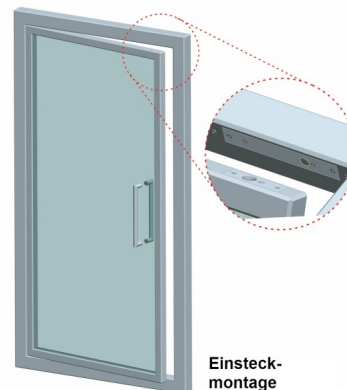

Einsteckmontage

Elektrische Installation

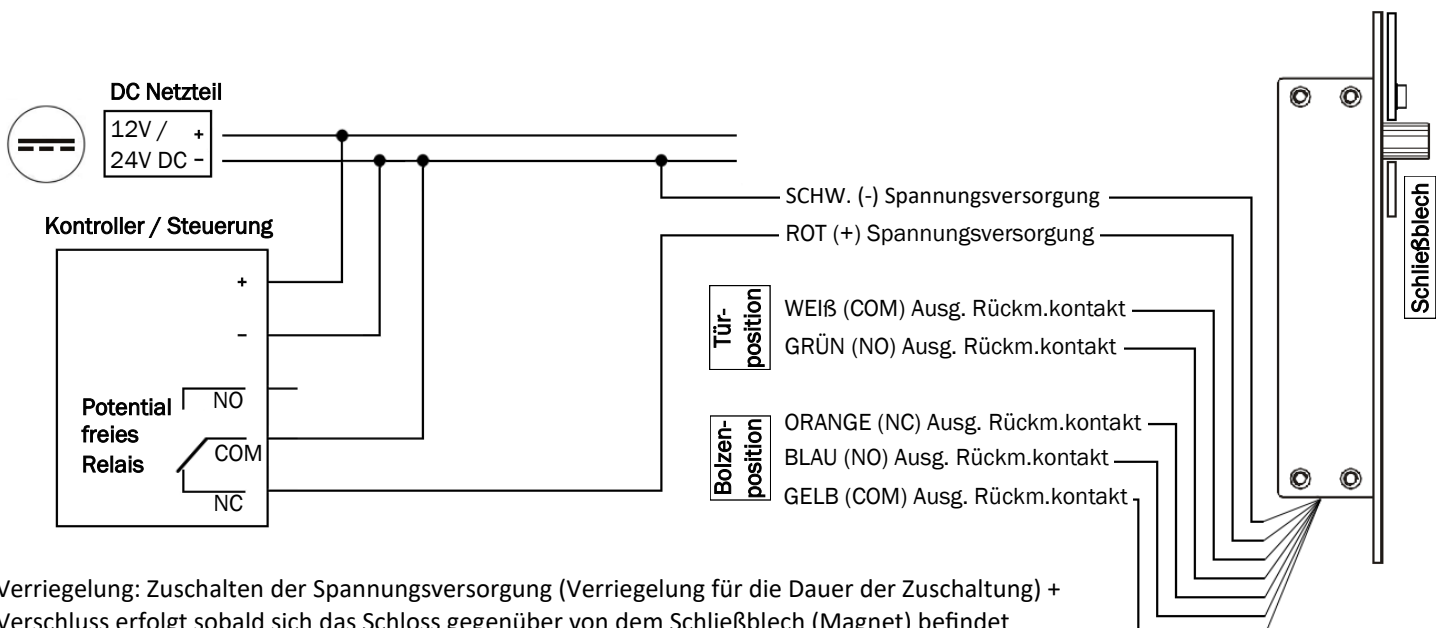

Model:

BS-200A-IP / BS-200A-IP-24 Fail Safe
(Unlocked without power)


Technical Data

Power supply	Permanent power supply is required for locking
Power consumption	BS-200A-IP: 12V DC / 0,5A // BS-200A-IP-24: 24V DC 0, 4A
Unlocking	Switching off the power supply (unlocking for the duration of the shutdown)
Locking	Switching on the power supply (locking for the duration of the switch-on) + locking occurs as soon as the lock is opposite the strike plate (magnet).
Waterproof Level	IP65
Bolt	Bolt: $\varnothing$ 16 mm / Length: 16mm / Stainless steel. Bezel: Aluminium - Case: Aluminium
Dimensions	See Product demensions below
Break-in resistance	Ca. 800 kg (Shear force)
Signal output	Door position: Reed contact (NO/COM) / Bolt position: Switch (NO/COM/NC)
Operating temperature	-30 °C bis +55 °C
Mounting	Doors (wooden doors, metal doors, plastic doors, ...)

Product features


Electric magnetic drive + spring.	BS-200A: Lock unlocks automatically in case of power failure.
Waterproof Level: IP65.	Suitable for use in damp rooms and outdoor areas.

Product demensions

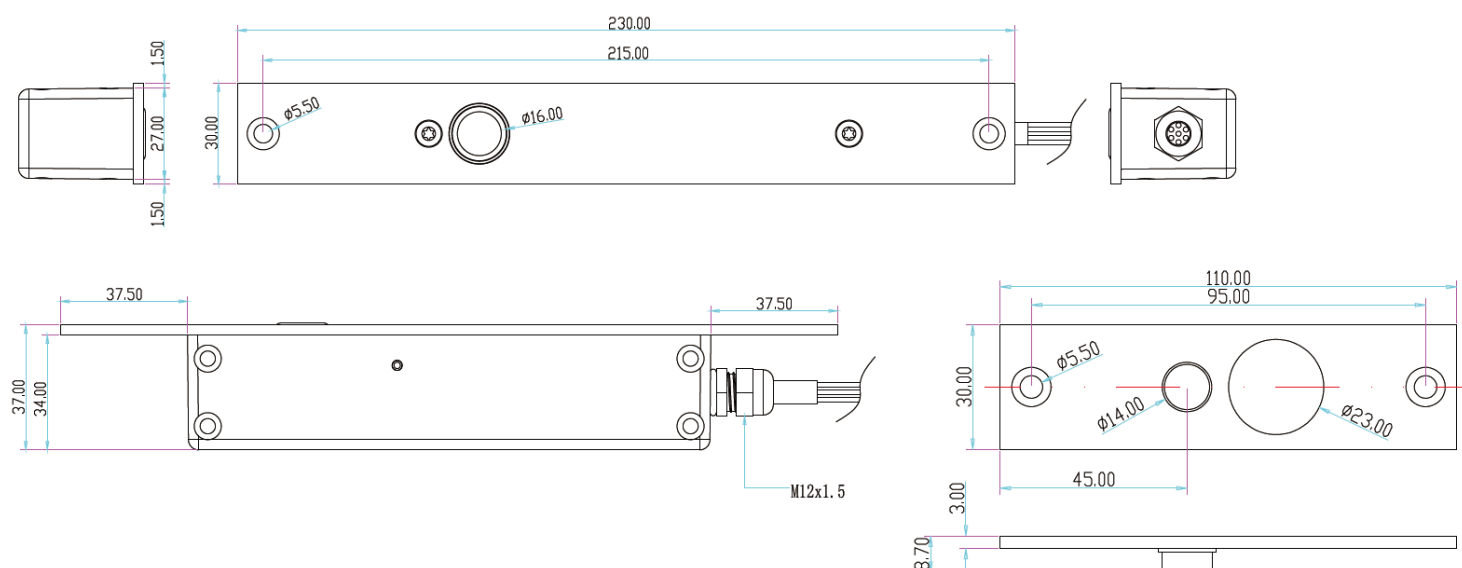


Model: **BS-200A-IP / BS-200A-IP-24 Fail Safe**
(Unlocked without power)


Mechanical installation

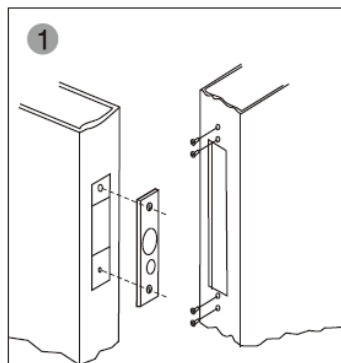


Mark the hole dimensions on the door leaf and cut the holes for the lock body and the magnetic plate.

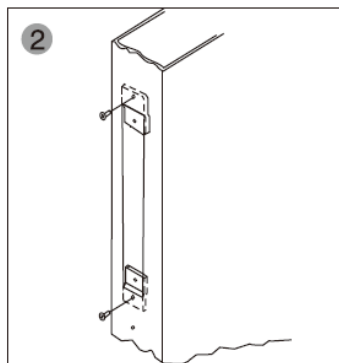

Install the mounting bracket.

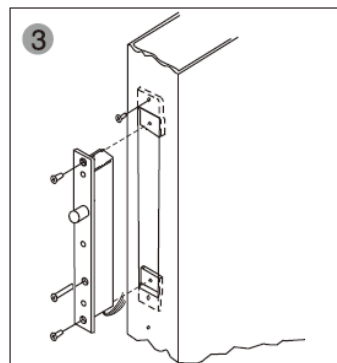

Connect the power supply.

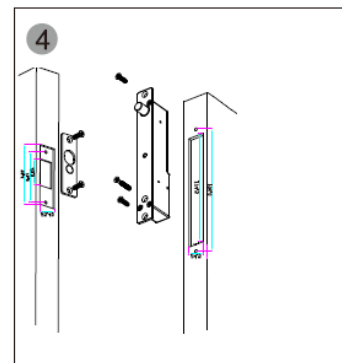


Attach the locking body, install the locking cylinder and the cover plate.

Installation Varianten




Oberflächen-
montage

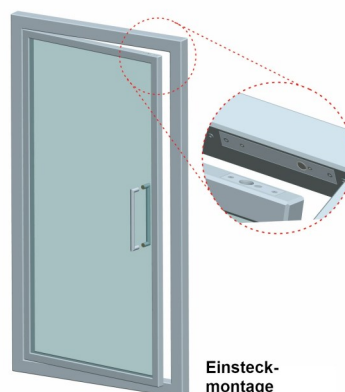

Einsteck-
montage

Electrical Installation

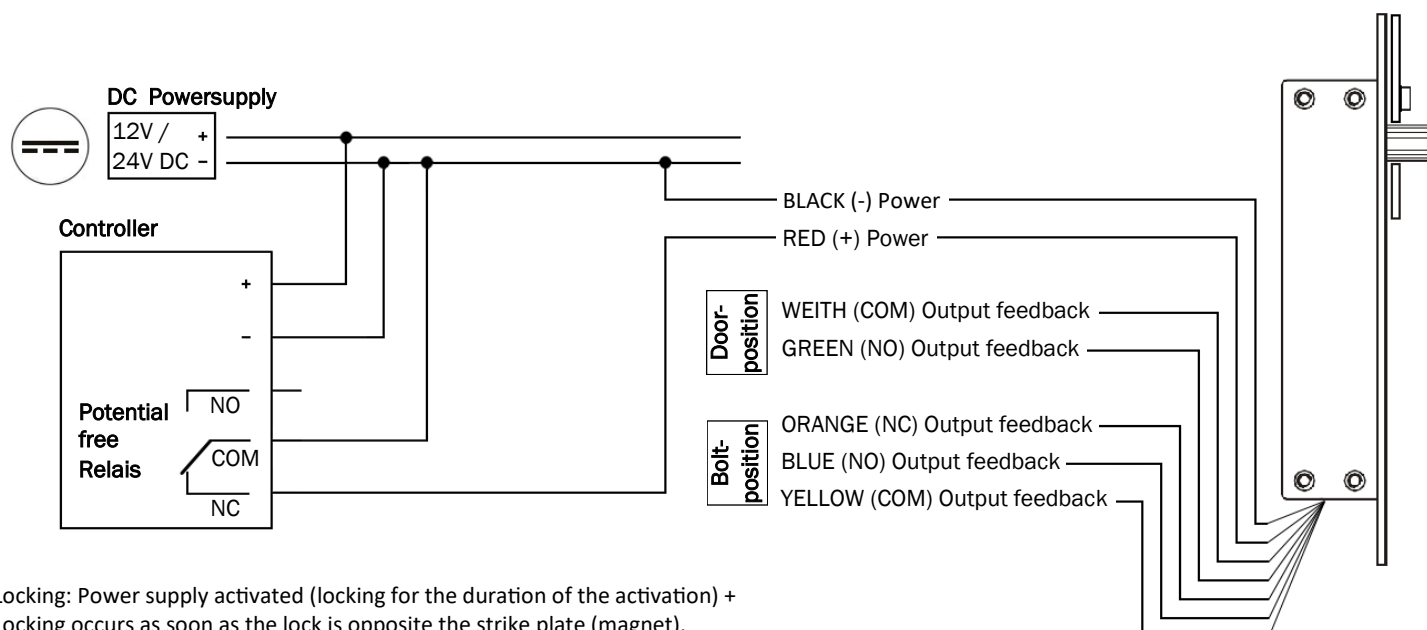

Locking: Power supply activated (locking for the duration of the activation) +
Locking occurs as soon as the lock is opposite the strike plate (magnet).