

Model:

KS-304A Fail Safe
(Stromlos entriegelt)


Technische Daten

Spannungsversorgung	12V DC $\pm$ 10% (Dauerhafte Spannungsversorgung notwendig)
Stromaufnahme	Betrieb: 12V DC - 0,1A (dauerhaft)
Entriegelungsimpuls	Abschalten der 12V DC Spannungsversorgung (Entriegelung nur für Dauer der Abschaltung)
Betriebstemperatur	-10 °C bis +60 °C
Material	Stahl, Vollmetallstruktur
Maße	Siehe Zeichnung
Aufbruchfestigkeit	Ca. 150 kg Druck-/Zugkraft
Mikroschalter	-
Mechanische Notöffnung	-
Farbe	Weiß
Montage	Aufputz (Innenmontage)

Produktmerkmale

Fail Secure (stromlos verriegelt)	Einsatz im Innen- und Außenbereich
Anti-Vandalismus-Funktion	Aufbruchfestigkeit: 150 kg
Stahlbolzen	Betriebstemperatur -10 °C bis +60 °C


Produktmaße

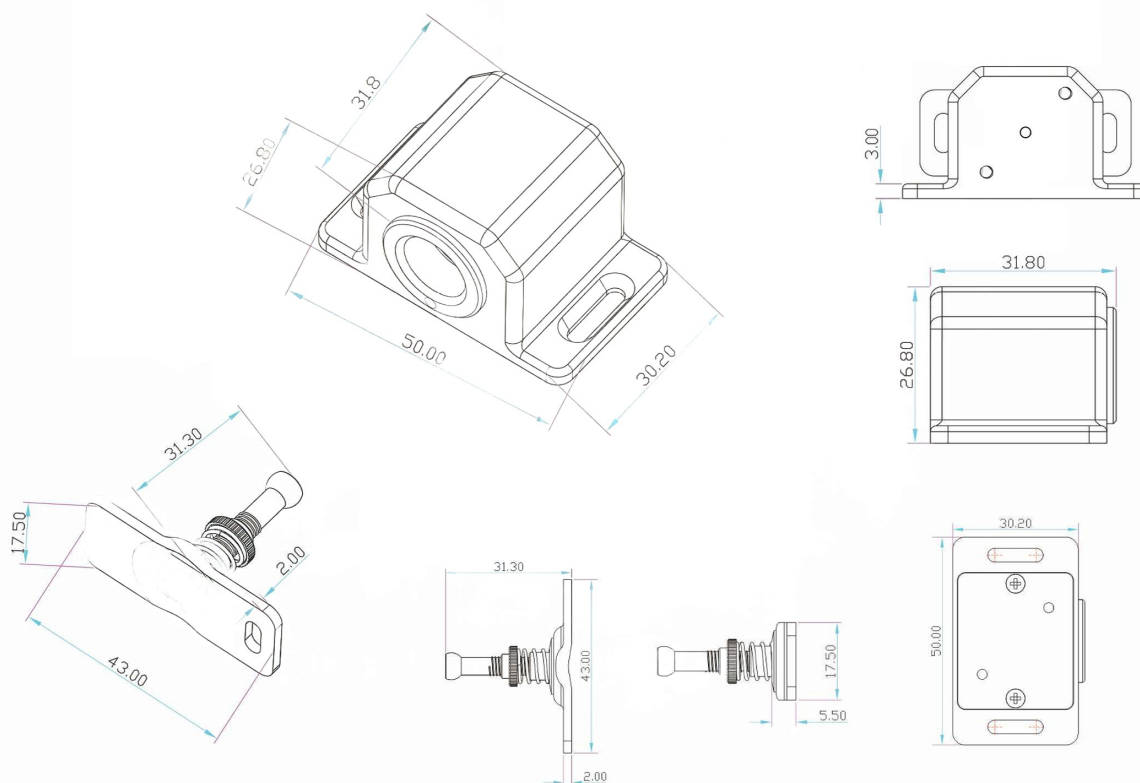


Model:

KS-304A Fail Safe
(Stromlos entriegelt)

Mechanische Installation

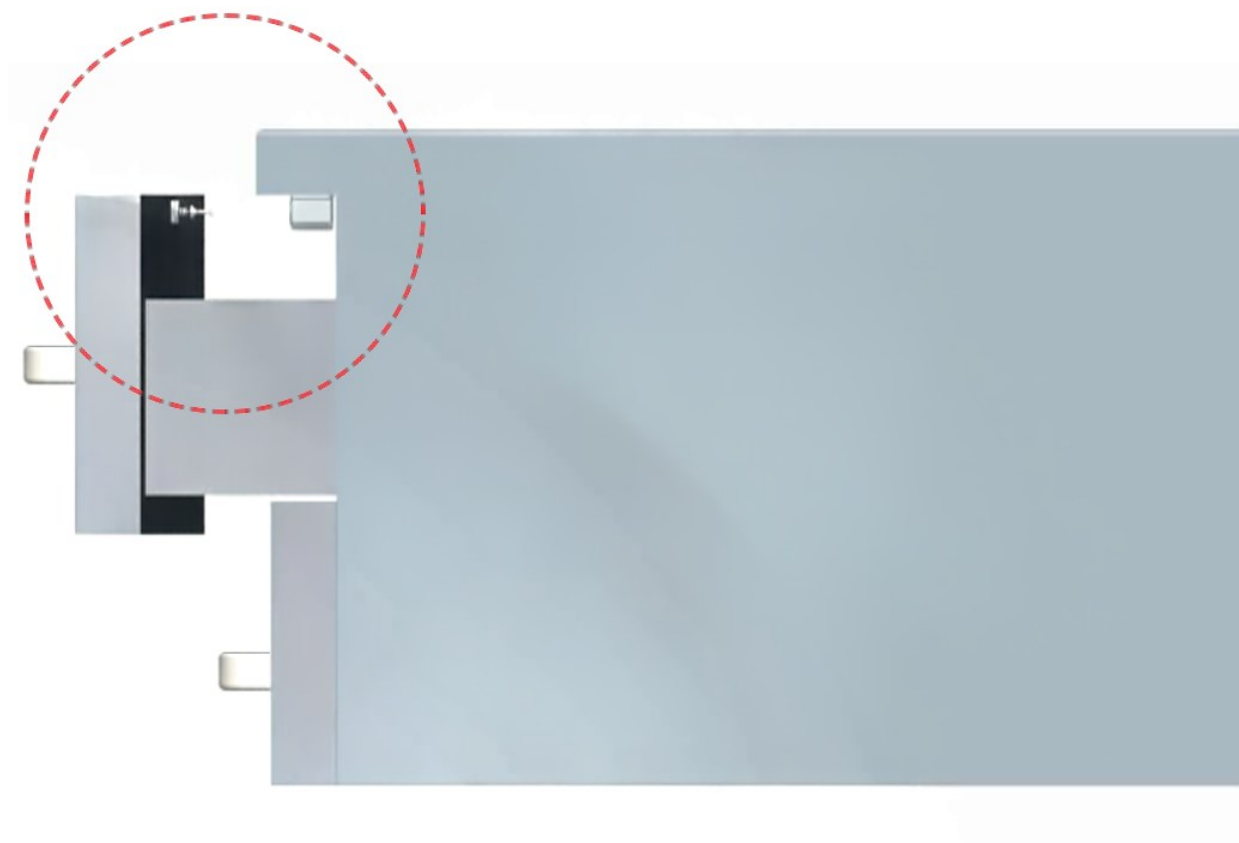

Elektrische Installation

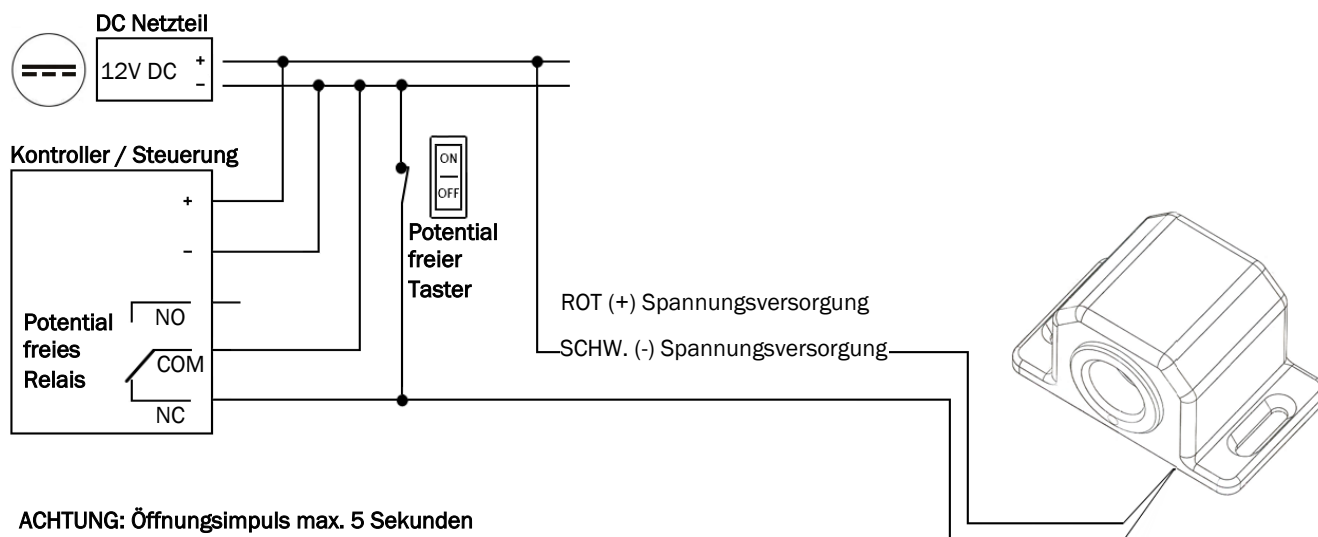

Model:

KS-304A Fail Safe
(Open without power)


Technical Data

Power supply	12V DC $\pm$ 10% (Continuous power supply required)
Power consumption	Operation: 12V DC - 0.1A (continuous)
Unlocking	Switching off the 12V DC power supply (unlocking only for the duration of the shutdown)
Operating temperature	-10 °C to +60 °C
Material	Steel, all-metal structure
Dimensions	See diagramm
Break-in resistance	Approximately 150 kg compressive/tensile force
Microswitch	-
Mechanical emergency opening	-
Color	White
Mounting	Surface mounting (inside installation)

Product features

Fail Secure (locks even without power)	Suitable for indoor and outdoor use
Anti-vandalism feature	Break-in resistance: 150 kg
Steel bolt	Operating temperature -10 °C to +60 °C

Product dimensions

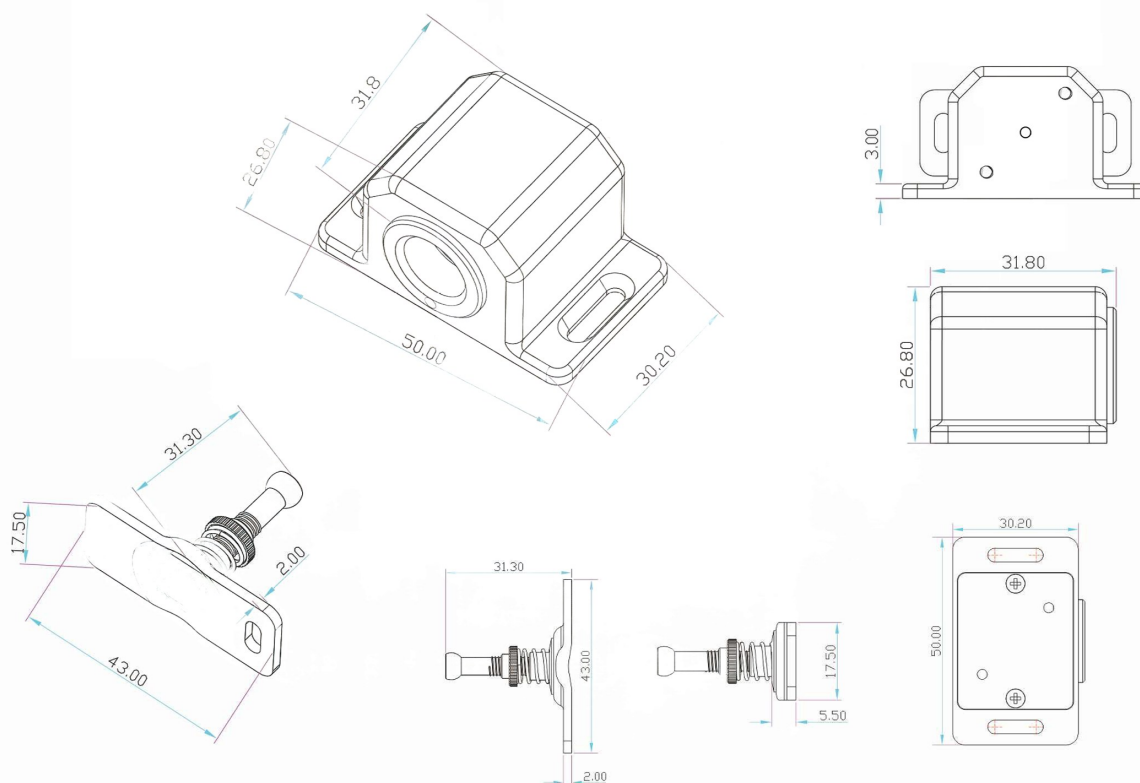


Model:


KS-304A Fail Safe

(Open without power)

Mechanical installation

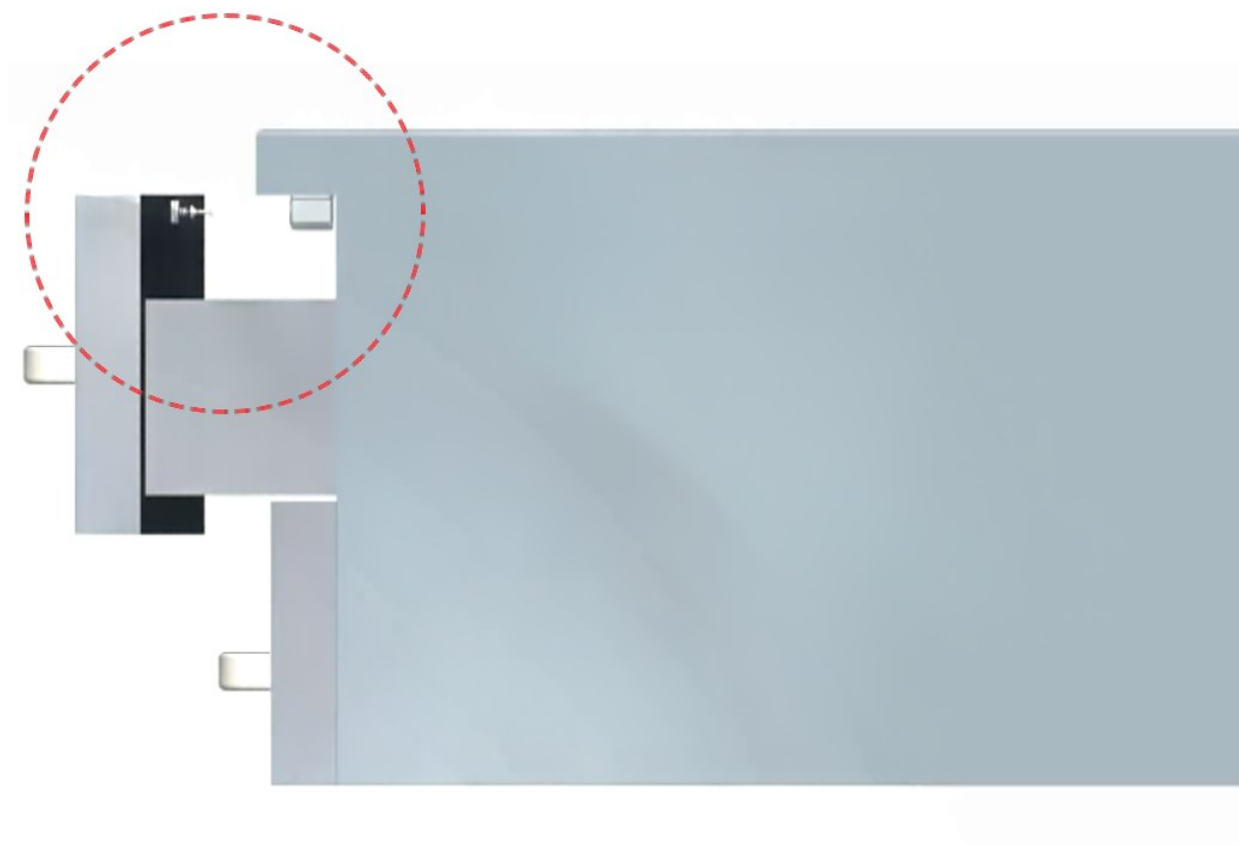

Electrical installation

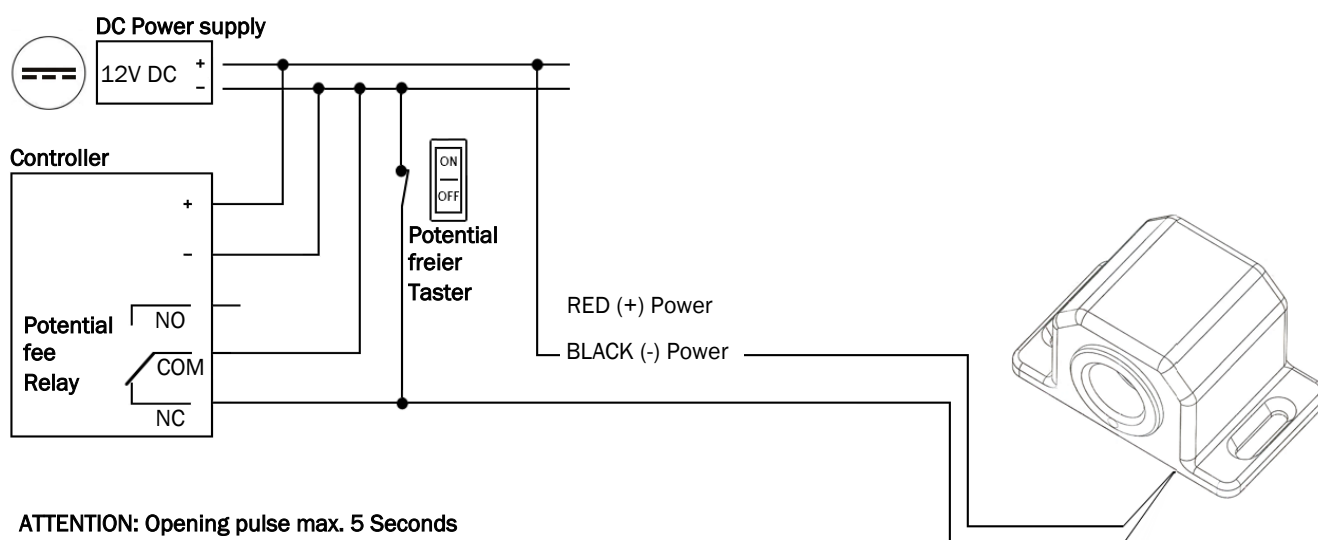

ATTENTION: Opening pulse max. 5 Seconds
Unlocking is achieved through a short impulse.